

(19) World Intellectual Property
Organization
International Bureau



01 MAR 2005



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020074 A1

(51) International Patent Classification⁷: **B01D 45/16**,
5/00, B04C 3/00, 3/06

TJEENK WILLINK, Cornelis, Antonie [NL/NL];
Volmerlaan 8, NL-2288 GD Rijswijk (NL).

(21) International Application Number:
PCT/EP2003/009810

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
2 September 2003 (02.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(30) Priority Data:
02078596.0 2 September 2002 (02.09.2002) EP

(71) Applicant (*for all designated States except US*): **SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).


Published:
— with international search report

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BETTING, Marco** [NL/NL]; Volmerlaan 8, NL-2288 GD Rijswijk (NL).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CYCLONIC FLUID SEPARATOR

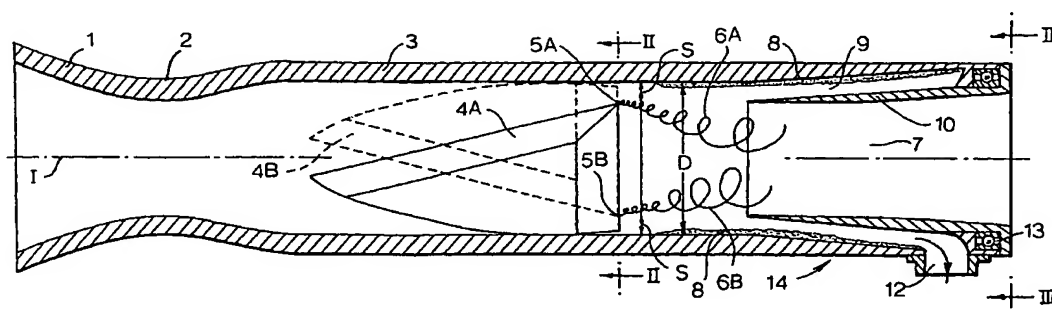

(57) Abstract: A cyclonic fluid separator for separating condensable, liquid and/or solid components from a fluid mixture comprises an upstream fluid inlet section in which the fluid mixture is accelerated to a supersonic velocity to expand and cool the fluid mixture such that one or more condensable fluid components are liquefied and/or solidified, a downstream separation section in which condensables depleted and condensables enriched fluid fractions are separated and fed into separate outlets, and a midstream vortex generation section which comprises a plurality of tilted wings of which the wing tips (5A, 5B) are located at relatively large mutual spacings (D) and at a small spacing ($S < 0.2W$) from the inner wall of the midstream vortex generation section such that during normal operation of the separator adjacent to the various wing tips widely spaced vortices 6A, 6B of swirling fluid are generated in the fluid stream flowing through the housing, which vortices 6A, 6B are still separated from each other at the entrance of the downstream separation section.

CYCLONIC FLUID SEPARATOR.

BACKGROUND OF THE INVENTION

The present invention relates to a cyclonic fluid separator for separating one or more condensable, liquid and/or solid components from a multi component fluid mixture.

Such a cyclonic fluid separator is known from European patent application 0496128 and from International patent application WO99/01194.

The cyclonic fluid separators known from these prior art references comprise an upstream inlet section in which the fluid is accelerated to a supersonic velocity and cooled, a midstream vortex generation section in which one or more tilted wings generate a vortex in the accelerated cold fluid stream and a downstream separation section in which condensables enriched and condensables depleted fluid fractions are separated and fed into separate fluid outlet conduits. The acceleration of the fluid stream in the inlet section to a supersonic velocity causes the fluid to expand and rapidly cool to a temperature well below 0 degrees Celsius such that one or more condensable components, for example aqueous and C₅⁺-hydrocarbon components, condense and/or solidify. The vortex generated by the tilted wing or wings in the cooled fluid stream causes the mixture of cold gaseous fluid components and a mist of condensed liquefied and/or solidified components to swirl around in the tubular midstream section of the tubular separator housing, whereby centrifugal forces create near a downstream end

of the midstream section a condensables enriched fluid mixture near the outer circumference of the interior of the tubular midstream section and a condensables depleted fluid mixture near a central axis of the tubular midstream section. The swirling fluid mixture subsequently flows from the midstream section into a separation section in which a tubular vortex finder is centrally arranged such that the condensables depleted fluid mixture flows into the interior of the tubular vortex finder and the condensables enriched fluid mixture flows into an annular space between the outer surface of the tubular vortex finder and the inner surface of the separation section of the separator.

Soviet patent specification SU 1768242 discloses a tubular cyclonic separator in which a fluid is fed into an annular nozzle in which a vortex is generated by a series of vanes, which extend between a central body within the nozzle and the tubular housing of the separator. Said central body has a larger cross-sectional circumference downstream of the vanes, such that a throat is created where the fluid is accelerated to a supersonic velocity and thereby expanded and cooled such that condensable components condense and/or solidify and a condensables enriched fluid stream is separated from the swirling fluid mixture via one or more outlet openings in the tubular separator housing

The known cyclonic fluid separators are able to separate a significant portion of condensable components from a fluid mixture and the present invention aims to further increase the separation efficiency of cyclonic fluid separators.

SUMMARY OF THE INVENTION

The cyclonic fluid separator according to the invention comprises an upstream fluid inlet section in which the fluid mixture is accelerated to near sonic or supersonic velocity to expand and cool the fluid mixture such that one or more condensable fluid components are liquefied and/or solidified, a downstream separation section in which condensables depleted and condensables enriched fluid fractions are separated and fed into separate outlets, and a tubular midstream vortex generation section comprising a plurality of tilted wings (see also fig 2) having wing tips that are located at a spacing S less than $0.2W$ from the inner surface of the tubular midstream vortex generation section, which has an internal width W in the region of the wing tips. The fluid fed to the cyclonic fluid separator might also contain liquid or solid particles to be separated in the downstream separation section.

It has been found that adjacent to the tip of each wing a vortex is generated and that adjacent to the various wing tips that are widely spaced from each other vortices are generated, that are also widely spaced from each other. Said vortices also swirl in helical paths around each other. Thus the centers of rotation of the various vortices form helical lines, which gradually commingle and converge towards a single vortex, which has a center of rotation at or near the central axis of the tubular housing.

It has been found that the presence of various widely spaced vortices generated at the widely spaced wing tips of the cyclonic fluid separation cyclone according to the invention significantly enhances its separation efficiency.

The entrance of the tubular vortex finder may have an oval or corrugated shape, which is adapted to the contours of the vortices at the location of said entrance.

5 The wings may be delta shaped and protrude from an inner surface of the midstream tubular vortex generation section. This vortex generation section may be located downstream of a throat section in which the fluid is accelerated to a supersonic velocity and thereby expanded
10 and cooled and upstream of a corrugated tubular vortex finder which separates the cooled gaseous phase from a cooled condensables enriched phase. It is preferred that the delta shaped wings span a majority of the width of the tubular midstream vortex generation section, such
15 that the cross-axial distance between the root and tip of each wing is more than $0.8W$ and that the distance between the tip of each wing and the opposite side of the inner surface of the tubular midstream section is less than $0.2W$, more particularly less than $0.15W$.

20 It will be understood that if the tubular midstream vortex generation section has a cylindrical inner surface the width W is equal to twice the internal diameter of said tubular section and that if said section is oval or corrugated that the width W equals the average internal
25 diameter of said section.

 Alternatively, the wings are mounted on a central wing carrier body which extends from a tubular separation section through a throat section into a nozzle in the tubular inlet section of the separator and comprises in
30 the region of the throat of the nozzle a profiled section having a larger cross-axial surface than the section of the carrier body on which the wings are mounted. Thus the wing carrier body forms a central mandrel within the

nozzle and reduces or eliminates the requirement of a throat portion where the tubular inlet section of the separator has a reduced internal diameter at the location of the nozzle. The width of the nozzle can be adjusted by moving the carrier body in longitudinal direction though the separator housing or by replacing the carrier body by another carrier body, which has a different profile in the region of the nozzle.

In this specification and in the appended claims the terms condensable components and/or condensables are intended to encompass components which condense and/or solidify at the prevailing local temperatures in the interior of the separator. Some condensable components, such as water vapour, may either first condensate to a mist of liquid droplets and then solidify into solid, e.g. ice, crystals, whereas other condensable components may instantly solidify from a gaseous into a solid phase.

DESCRIPTION OF A PREFERRED EMBODIMENT

The invention will be described in more detail and by way of example with reference to the accompanying drawings, in which:

Fig.1 is a schematic longitudinal sectional view of a cyclonic fluid separator according to the present invention;

Fig.2 is a cross-sectional view of the cyclonic fluid separator of Fig.1 taken along line II-II and seen in the direction of the arrows;

Fig.3 is a cross-sectional view of the downstream end of the cyclonic fluid separator of Fig.1 taken along line III-III and seen in the direction of the arrows;

Fig.4 is a schematic partially cross-sectional view of an alternative embodiment of the cyclonic fluid separator according to the invention wherein four delta-

shaped swirl imparting wings are mounted on a central wing carrier body; and

Fig.5 is a cross sectional view of the cyclonic fluid separator of Fig.4 taken along line V-V and seen in the direction of the arrows.

Referring to Fig.1 there is shown a cyclonic fluid separator in which a multicomponent fluid mixture passes from an upstream inlet section 1 into a throat section 2 in which the fluid mixture is accelerated to a supersonic velocity and thereby expanded and adiabatically cooled such that one or more condensable components of the fluid mixture condense and/or solidify to liquid droplets and/or solid particles. The cooled mixture then flows at a supersonic velocity into a tubular midstream vortex generation section 3 in which a pair of delta shaped wings 4A and 4B are arranged at a sharp angle relative to a central axis I of the separator, which wings 4A and 4B generate vortices 6A and 6B in the fluid mixtures, which vortices 6A and 6B leave the wings 4A and 4B at or near the wing tips 5A and 5B. As a result of centrifugal forces the fluid near the centers of rotation of the vortices 6A and 6B consists of a substantially dry low density gaseous phase which is fed into a primary central fluid outlet 7. The liquid droplets and-or solid particles which have a higher density than the low density gaseous phase are centrifuged to the outer periphery of the vortices 6A and 6B and may form an annular liquid film or slurry 8 at the inner surface of the tubular separation section 3 downstream of the wings 4A and 4B, which is fed into an annular secondary outlet 9 which is separated from the central primary fluid outlet 7 by a tubular vortex finder 10. The annular

secondary outlet 9 discharges the condensables enriched fluid mixture into a secondary fluid outlet conduit 12.

As shown in Fig.1 and 2 the tubular vortex generation section 3 has in the region of the wing tips 5A and 5B an inner width W.

In accordance with the invention the wing tips 5A and 5B are each located at a relatively small spacing S, less than $0.2W$, from the inner surface of the tubular vortex generation section 3 and at a relatively large mutual distance D, which is between $0.6W$ and $0.99W$, and preferably between $0.8W$ and $0.98W$. The relatively large distance D between the wing tips causes that the centers of rotation of the vortices 6A and 6B are also located at a large distance from each other. The centers of rotation of the vortices 6A and 6B have a substantially helically shape around the central axis I and will gradually converge towards the central axis I. It has been found beneficial to the separation efficiency of the cyclonic separator if the tubular vortex finder 10 in the downstream separation section 14 has an entrance 11 which is located such that the vortices 6A and 6B have not yet commingled into a single vortex and if said entrance 11 has a corrugated shape as illustrated in Fig 3. The vortex finder 10 is connected to the downstream end of the separator housing by a bearing assembly 13, which allows the vortex finder 10 to be rotated about the central axis I relative to the separator housing. Thus the vortex finder 10 may be rotated such that the centers of rotation of the swirls 6A and 6B are located near the centers of the outer lobes 11A and 11B of the corrugated entrance 11 vortex finder 10. The rotation of the vortex finder 10 may be controlled in response to a measurement of the liquid and/or solids content of the fluid

discharged via the primary and secondary outlets 7 and 9 and such that the liquid and/or solids content in the primary outlet 7 is minimized whereas the liquid and/or solids content in the secondary outlet is maximized.

5 Fig. 5 shows an alternative embodiment of the cyclonic separator according to the invention wherein an assembly of four delta-shaped wings 50 is mounted on a central wing carrier rod 51. The rod 51 is rotatably arranged within a tubular separation section 52 of the
10 separator and may extend through the throat section 53 and inlet 54.

As illustrated in Fig.5 and 6 the wing tips 55 are located a small spacing S from the inner surface of the tubular separation section 52 such that the wing tips
15 widely spaced vortices 56 are generated. These vortices swirl helically around and will gradually converge towards a central axis V of the separator. A corrugated vortex finder (not shown) having four lobes may be arranged at the downstream separation section 58 of the
20 separator such that each vortex enters one of the lobes. The vortex finder may be fixedly secured within the downstream separation section 58 of the separator and the central wing carrier rod 51 may be rotated relative to the separator housing to focus the vortices 56 accurately
25 into the lobes of the corrugated vortex finder.

C L A I M S

1. A cyclonic fluid separator for separating condensable, liquid and/or solid components from a fluid mixture, the separator comprising an upstream fluid inlet section in which the fluid mixture is accelerated to a
5 near sonic or supersonic velocity to expand and cool the fluid mixture such that one or more condensable fluid components are liquefied and/or solidified, a downstream separation section in which condensables depleted and condensables enriched fluid fractions are separated and
10 fed into separate outlets , and a tubular midstream vortex generation section comprising a plurality of tilted wings having wing tips that are located at a spacing S less than $0.2 W$ from the inner surface of the tubular midstream vortex generation section , which has
15 an internal width W in the region of the wing tips.

2. The cyclonic fluid separator of claim 1, wherein the separator is designed to be fed with a fluid stream containing liquid and/or solid particles and to
20 accelerate and cool the fluid stream to near sonic or supersonic velocities in the tubular midstream section and to remove the cooled particles from the fluid stream in a downstream separation section.

3. The cyclonic fluid separator of claim 1, wherein the wing tips are located in a rotational symmetrical
25 configuration relative to a central axis of the tubular midstream vortex generation section.

4. The cyclonic fluid separator of claim 2, wherein a pair of tilted delta-shaped wings protrude from the inner surface of the tubular midstream vortex generation

section in a rotational symmetrical configuration relative to the central axis of the tubular midstream vortex generation section and such that the wing tips are located at substantially diametrically opposite locations relative to said central axis.

5 5. The cyclonic fluid separator of claim 3, wherein the distance (D) between the wing tips is between 0.6W and 0.99W, more particularly between 0.8W and 0.98W.

10 6. The cyclonic fluid separator of claim 2, wherein three tilted delta shaped wings protrude from the inner surface of the tubular midstream vortex generation section in a rotational symmetrical configuration relative to the central axis of the tubular midstream vortex generation section and such that the wing tips are
15 located at angular intervals of substantially 120 degrees relative to said central axis.

20 7. The cyclonic fluid separator of claim 1, wherein at least two delta-shaped wings are mounted at regular angular intervals on an elongate wing carrier body which is substantially co-axial to the central axis of the tubular midstream vortex generation section.

25 8. The cyclonic fluid separator of claim 2, wherein a corrugated tubular vortex finder is arranged within the separation section of the separator and a condensables depleted fluid outlet is connected to the interior of the vortex finder and a condensables enriched fluid outlet is connected to an annular space between the outer surface of the tubular vortex finder and the inner wall of the separation section of the separator.

30 9. The cyclonic fluid separator of claim 7, wherein the orientation of the corrugated tubular vortex finder is adaptable relative to the central axis of the tubular midstream section of the separator.

- 11 -

10. The cyclonic fluid separator of any preceding claim,
wherein the wing carrier body extends through a throat
5 section in the tubular inlet section of the separator and
comprises in the region of a throat portion of the nozzle
a profiled section having a larger cross-axial surface
than the section of the carrier body on which the wings
are mounted.

10 11. The cyclonic fluid separator of claim 6, wherein the
wing carrier body is rotatably mounted within the tubular
midstream section of the separator.

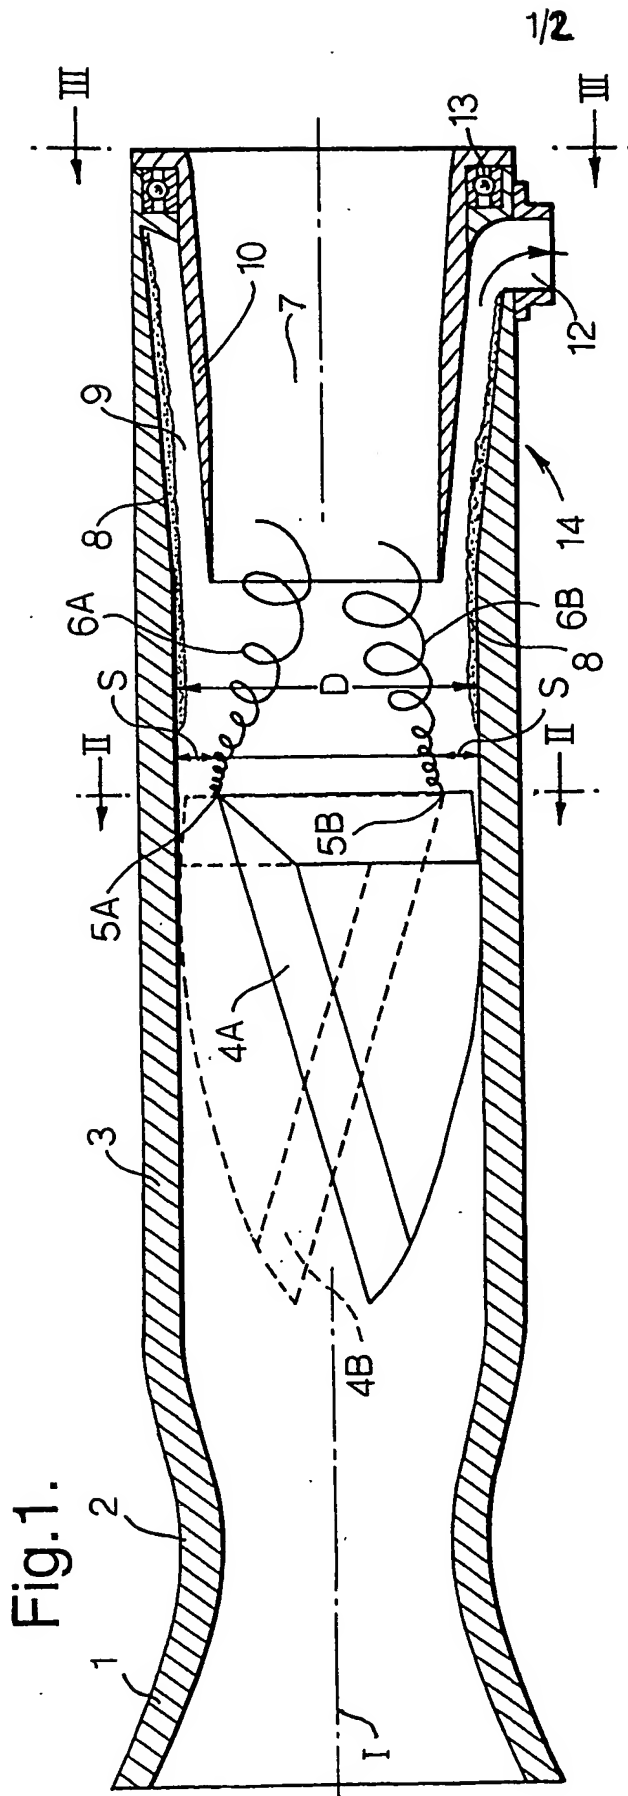


Fig.2.

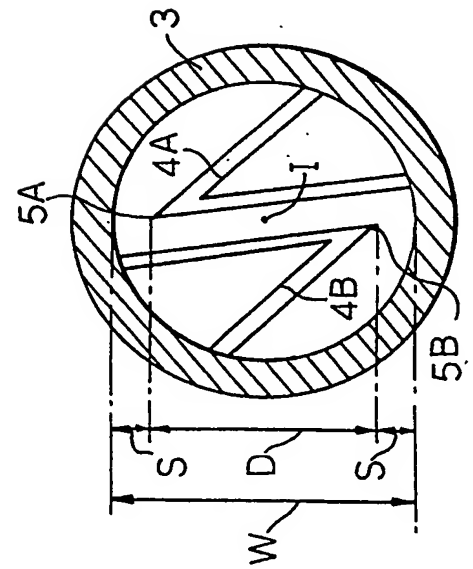
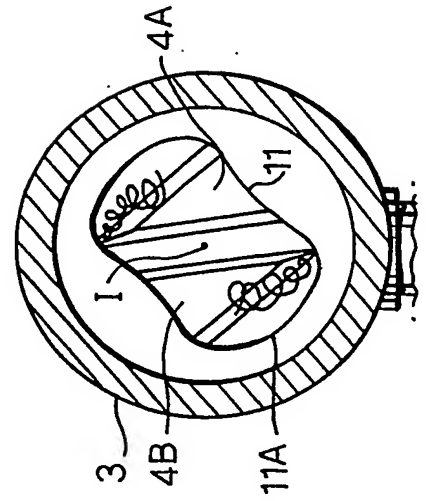


Fig.3.



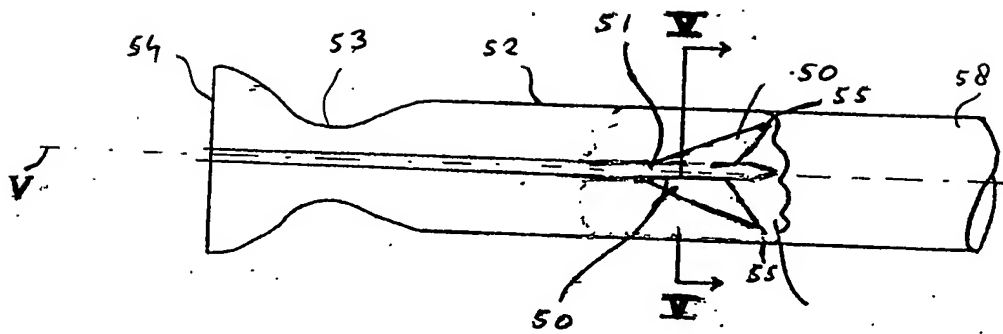


FIG. 5.

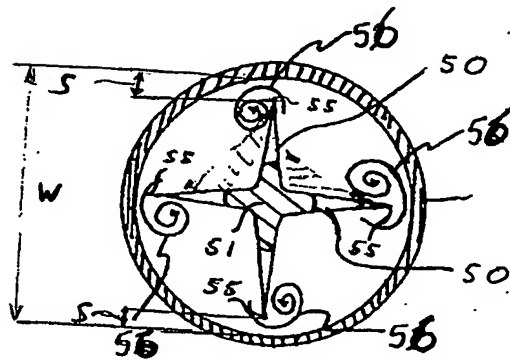


FIG. 4.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/09810

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B01D45/16 B01D5/00 B04C3/00 B04C3/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01D B04C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 40835 A (SHELL INTERNATIONAL RESEARCH MAATSCHAPPIJ) 13 July 2000 (2000-07-13) the whole document	1-5
A	WO 99 01194 A (SHELL INTERNATIONAL RESEARCH MAATSCHAPPIJ) 14 January 1999 (1999-01-14) cited in the application the whole document	1
A	EP 0 496 128 A (STORK PRODUCT ENGINEERING) 29 July 1992 (1992-07-29) cited in the application the whole document	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

7 November 2003

Date of mailing of the international search report

17/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Bertram, H

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/09810

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0040835	A	13-07-2000	
		AT 248025 T	15-09-2003
		AT 241757 T	15-06-2003
		AU 2104500 A	24-07-2000
		AU 750936 B2	01-08-2002
		AU 2434700 A	24-07-2000
		BR 9916717 A	04-12-2001
		BR 9916718 A	04-12-2001
		CA 2357635 A1	13-07-2000
		CN 1334897 T	06-02-2002
		CN 1123395 B	08-10-2003
		CZ 20012372 A3	13-03-2002
		DE 69908420 D1	03-07-2003
		DE 69910829 D1	02-10-2003
		DK 1141520 T3	15-09-2003
		EA 2399 B1	25-04-2002
		EG 22030 A	30-06-2002
		WO 0040338 A1	13-07-2000
		WO 0040835 A1	13-07-2000
		EP 1140363 A1	10-10-2001
		EP 1141520 A1	10-10-2001
		JP 2002534248 T	15-10-2002
		NO 20013262 A	17-08-2001
		NZ 512604 A	31-01-2003
		TW 495388 B	21-07-2002
		US 6513345 B1	04-02-2003
		ZA 200105389 A	01-07-2002
		AT 241756 T	15-06-2003
		AU 755360 B2	12-12-2002
		AU 3044600 A	24-07-2000
		BR 9916719 A	04-12-2001
		CA 2358071 A1	13-07-2000
		CN 1334896 T	06-02-2002
		DE 69908419 D1	03-07-2003
		DK 1141519 T3	15-09-2003
		WO 0040834 A1	13-07-2000
		EP 1141519 A1	10-10-2001
		NO 20013263 A	17-08-2001
		NZ 512601 A	30-06-2003
		ZA 200105390 A	30-09-2002
WO 9901194	A	14-01-1999	
		AU 725574 B2	12-10-2000
		AU 8857098 A	25-01-1999
		BR 9810386 A	05-09-2000
		CN 1261814 T	02-08-2000
		DE 69809274 D1	12-12-2002
		DE 69809274 T2	28-08-2003
		DK 1017465 T3	25-11-2002
		EA 1591 B1	25-06-2001
		EG 21611 A	31-12-2001
		WO 9901194 A1	14-01-1999
		EP 1017465 A1	12-07-2000
		ES 2186204 T3	01-05-2003
		JP 2002507152 T	05-03-2002
		NO 996546 A	29-12-1999
		NZ 501454 A	29-09-2000
		ZA 9805706 A	27-01-1999
EP 0496128	A	29-07-1992	
		EP 0496128 A1	29-07-1992

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.